

XP-T890H

Thermal Receipt Printer

Xprinter®

- Cutter life upgrade to 2 million cuts.
- Supports 58/80/82.5mm paper roll width.
- Printhead life upgrade to 150km.
- Up to 300mm/s printing speed.
- Easy Maintenance: 5S for firmware update.
- Steady performance: Apply auto cutter error calibration and printhead overheat protection system.
- Excellent compatibility, rich software on Windows, Linux, Mac, Android, and IOS operating system.




Coffee Shop



Shopping



Mart

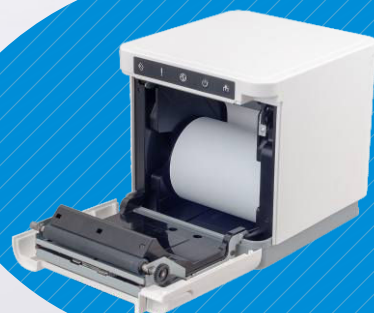

XP-T890H

Thermal Receipt Printer



| Printing | |
|----------------------------|---|
| Printing method | Direct thermal |
| Paper width | 58 / 80 / 83±0.5mm |
| Print width | 72mm/ 76mm/ 80mm/ 64mm/ 48mm/ 52mm |
| Paper roll diameter | Min:13mm Max:83mm |
| Column capacity | 576 dots/line(adjustable by command) |
| Printing speed | 300 mm/s |
| Interface | USB+Serial+Lan (Optional:Bluetooth/WIFI) |
| Line spacing | 3.75mm (Adjustable by commands) |
| Column number | 80mm paper: Font A - 42 columns or 48 columns/Font B - 56 columns or 64 columns/ Chinese, traditional Chinese - 21 columns or 24 columns |
| Character size | ANK, Font A: 1.5×3.0mm(12×24 dots) Font B: 1.1×2.1mm(9×17 dots) Chinese, traditional Chinese:3.0×3.0mm(24×24 dots) |
| Cutter | |
| Auto cutter | Partial |
| Barcode Character | |
| Extension character sheet | PC347(Standard Europe) / Katakana / PC850(Multilingual) / PC860(Portuguese) / PC863(Canadian-French) / PC865(Nordic) / West Europe / Greek / Hebrew / East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / Pc858 /IranII / Latvian / Arabic / PT151(1251) |
| Barcode types | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128 |
| 2D Barcode | QR CODE / PDF417 |
| Input buffer | 2048 Kbytes |
| NVFlash | 256 Kbytes |
| Power | |
| Power adaptor | Input: AC 220V, 50 ~ 60Hz Output: DC 24V/2.5A |
| Printer input | DC 24V/2.5A |
| Cash drawer output | DC 24V/1A |
| Physical characteristics | |
| Weight | 1.1 Kg |
| Dimensions | 140*130*133mm(D*W*H) |
| Environmental Requirements | |
| Work environment | Temperature (0 ~ 45°C) humidity(10 ~ 80%) |
| Storage environment | Temperature(-10 ~ 60°C) humidity(10 ~ 80%) |
| Reliability | |
| Cutter life | 2 million cuts |
| Printer head life | 150 KM |
| Software | |
| Emulation | ESC/POS |
| Driver | Windows/JPOS/Linux/Android/Mac/OPOS |
| Utility | Windows & Linux test Utility |
| SDK | iOS/ Android/ Windows |



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

